

## Prestige Satin Guard™

Paint Protection Film

Technical Data

### General Description

Satin Guard™ Paint Protection Film is a semi-clear, satin finish thermal urethane film designed to help prevent automotive paint damage from road debris and general wear. Satin Guard™ was designed with DualTone™ Technology built into it to offer two different sheens based on lower / brighter lighting conditions. Satin Guard™ protects like conventional paint protection film (clear bra) and does not affect OEM paint, which means it can be removed at a later time without affecting factory paint.

Prestige Satin Guard™ is conformable and made with an aggressive acrylic adhesive designed to OEM paint specifications.

### General Warranty


Prestige Satin Guard™ comes with a 7 year warranty from material defects in manufacturing, bubbling from adhesive failure, and cracking from UV exposure. This Warranty does not imply coverage from improper application, misuse, physical impact, exposure to abrasives, polishes, solvents, corrosive chemicals, or general wear. Warranty is only valid for the original registered owner, non transferrable, and begins from the original date of purchase.

### Film Construction

Satin finish PET urethane  
with DualTone™ Technology

Acrylic adhesive

Release liner

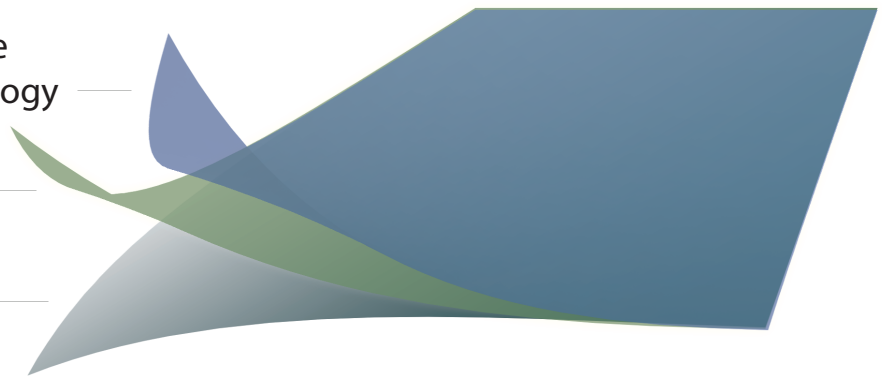

### Properties

Film Thickness	6.0 mils
Adhesive Thickness	2.0 mils
Liner Thickness	4.0 mils
Tensile PSI (Mpa)	1740 (12)
Elongation at Break	428%
Peel Adhesion	50 oz / 20 mm
Weathering Test	2600 hours of UV exposure with no significant discoloration or adverse degradation of satin finish  Min. Continuous Temperature (-5° F / -20.5° C) Max. Continuous Temperature (221° F / 105° C)
Solvent Test	Acid: 45min continuous exposure with no adverse reaction Hard Water and Soap: 45min continuous exposure with no adverse reaction  Salt Spray: 45min continuous exposure with no adverse reaction Ink Marks: 1 hr dry time and wiped off with no adverse reaction